

Technical Data Sheet



Available From



(03) 9460 2377

sales@statewidehydraulics.com.au
www.statewidehydraulics.com.au

CRADLES FOR UNDERBODY HOISTS

Cadles for Underbody Hydraulic Hoists

The underbody hoist cradles are for applications where underbody hoists are to be used in tandem or for 3 way tipping systems.

The cradle allows the hoist to have freedom of movement to prevent lateral loading thereby preventing damage to the hoist.

To be used with the Hydreco underbody hoist range.

Product Features

- **Compact Size**
Easily installed under tipper body.
- **Rugged Construction**
Increases working life.

Available From



(03) 9460 2377

sales@statewidehydraulics.com.au
www.statewidehydraulics.com.au

POWAUTO

DAVID BROWN
HYDRAULICS




HYDRECO
POWAUTO

ADVANCED HYDRAULIC TECHNOLOGIES

www.hydreco.com


Technical Data Sheet

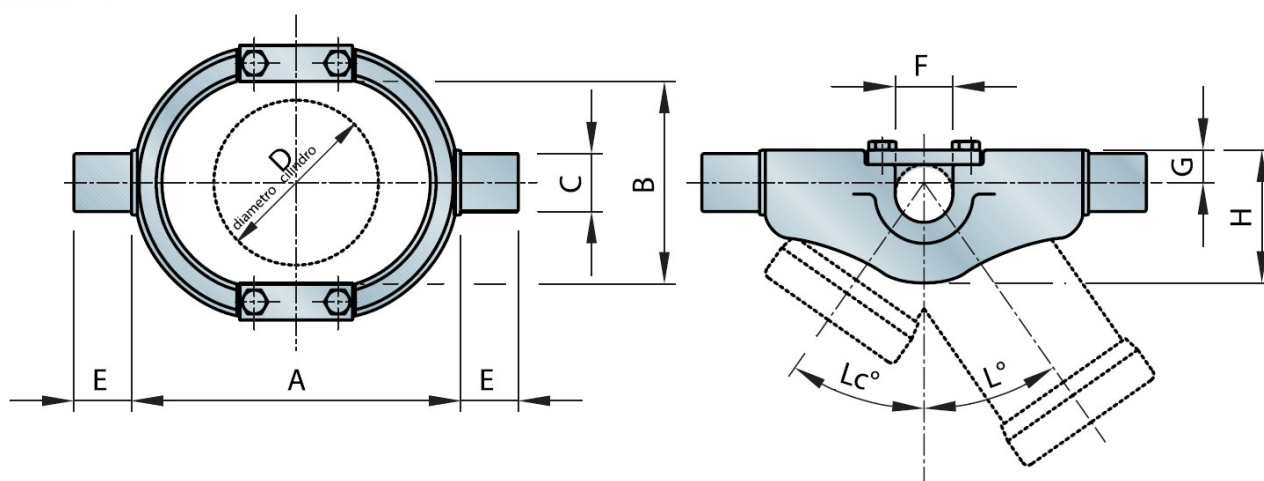

Cradle Designation	Dimensions, mm								Angle L	Angle Lc	Weight kg
	A	B	C	D	E	F	G	H			
UB3WC-95	200	120	ø35	ø95	35	ø35	25	77	35°	27°	5.5
UB3WC-114	230	140	ø40	ø114	40	ø35	27	90	35°	30°	8.0
UB3WC-127	230	155	ø40	ø127	40	ø40	29	110	32°	28°	9.5
UB3WC-152	280	180	ø50	ø152	40	ø45	45	120	32°	28°	13.5
UB3WC-193	390	235	ø50	ø193	52	ø50	67	185	32°	29°	29.5

In addition, each cradle will require two (2) feet for mounting,

Feet size is determined from diameter "C".

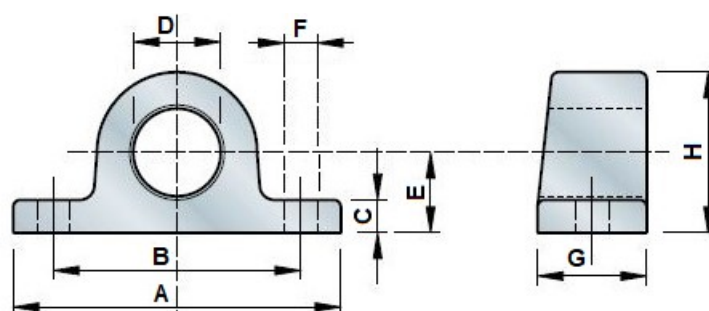

Feet Designation	Dimensions, mm								Mass/foot kg
	S	T	U	V	W	X	Y	Z	
UBFM-35	130	95	12	36	30	13	40	56	0.8
UBFM-40	140	108	15	41	33	15	45	66	1.2
UBFM-45	140	108	15	46	33	15	45	66	1.2
UBFM-50	150	116	15	51	36	15	45	71	1.3

Available From



(03) 9460 2377

sales@statewidehydraulics.com.au
www.statewidehydraulics.com.au

Doc: UBH CRADLE—06/22

POWAUTO

DAVID BROWN
HYDRAULICS



HYDRECO
POWAUTO
ADVANCED HYDRAULIC TECHNOLOGIES

www.hydreco.com